


EN

- High temperatures can harm LiPo batteries.
- Using at low temperatures will reduce battery life.
- Reducing light output will increase runtime.
- A wall charger with 5V/500mA will increase charging time.
- Proper light setup is important to avoid disturbing other traffic.
- Do not look directly into the lens when the light is powered on.
- Please mount the light 1.8 degrees below the horizontal angle to obtain the lighting effect that meets the STVZO regulations.

DE

- Hohe Temperaturen können LiPo-Akkus schaden.
- Der Gebrauch bei niedrigen Temperaturen verkürzt die Lebensdauer des Akkus.
- Eine Reduzierung der Lichtleistung verlängert die Laufzeit.
- Ein Wandladegerät mit 5V/500mA verlängert die Ladezeit.
- Die richtige Einstellung der Beleuchtung ist wichtig, um andere Verkehrsteilnehmer nicht zu stören.
- Schauen Sie nicht direkt in die Linse, wenn das Licht eingeschaltet ist.
- Bitte montieren Sie das Licht 1,8 Grad unterhalb des Horizontalwinkels, um einen Lichteffect zu erzielen, der den Vorschriften der STVZO entspricht.

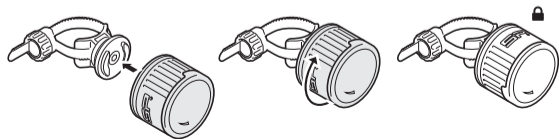

Technical Specifications

Input	5V, 900 mA
Battery voltage	3.8V
Battery capacity	3,42Wh, 900mAh
Working temperature	-20-40°C / -4-104°F
Working humidity	30-95% RH


IP55 RATED: Product is protected against dust ingress that could be harmful for the normal operation of the product but is not fully dust tight. It is protected against solid objects and water jets projected by a nozzle (6.3mm) from any directions.




BIKE FRONT LIGHT 270 StVZO



1



2




USB C
 Power Source
 Stromquelle

3






Control Button
Kontrolltaste

ON/OFF	Long press / Lange drücken
BATTERY STATUS (LIGHT OFF)	Short press / Kurz drücken
SWITCH MODE (LIGHT ON)	Short press / Kurz drücken

Battery Status
Akku-Status

	GREEN	>30%
	RED	<30%

Charging
Laden

	RED	<70%
	GREEN	>70%
	OFF	100%

MODE	Lighting
M1	steady, >30% Battery, -90min
M2	steady, -200min



Too high
Zu hoch



-7° angle
-7° Winkel



Too low
Zu niedrig